


Heavy Duty Galvanized Wire Rope Thimble (Imported)

CATALOG (SKU) NUMBER: HD THIMBLE

- Made From Hot Rolled Mild Steel.
- Used for protection of eye in wire rope sling.
- Commonly used with a shackle.
- Hot dipped galvanized.
- Meets Performance Requirements of Federal Spec FF-T-276B Type III.
- Other sizes available upon request.

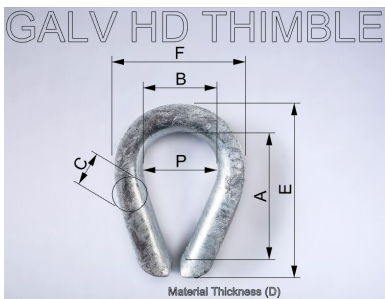

HD galv thimble



HD Wire Rope Thimble

Product Specifications

HEAVY DUTY GALVANIZED WIRE ROPE THIMBLE (IMPORTED)									
PART NUMBER	WIRE ROPE DIAMETER SIZE (IN)	WEIGHT PER 100 (LBS)	DIMENSIONS (IN)						
			A	B	C	D	E	F	P (PIN)
I51243	1/8	2.00	1.1250	.6250	.1563	.0469	1.4844	1.2344	.6250
I51245	3/16	3.40	1.4375	.6875	.2500	.0469	1.8125	1.5000	.6875
I51250	1/4	6.50	1.6250	.8750	.2813	.0625	2.1250	1.5000	.8125
I51255	5/16	11.80	1.8750	1.0625	.3750	.0781	2.5000	1.8125	.9375
I51260	3/8	21.60	2.1250	1.1250	.4375	.1094	3.0000	2.1250	1.0625
I51265	7/16	34.70	2.3800	1.2500	.4500	.1200	3.2500	2.6250	1.2500
I51270	1/2	51.00	2.7500	1.5000	.6250	.1406	3.6250	2.6875	1.4375
I51275	5/8	75.70	3.2500	1.7500	.6875	.1563	4.2500	3.1250	1.6250
I51280	3/4	158.10	3.7500	2.0000	.8125	.2188	5.0000	3.8125	1.8750
I51285	7/8	177.80	4.2500	2.2500	.9375	.2188	5.5000	4.2500	2.1250
I51290	1	313.90	4.5000	2.5000	1.0625	.2500	6.1250	4.9375	2.3750
I51295	1-1/8-1-1/4	400.00	5.1250	2.8750	1.3125	.2500	7.0000	5.8750	2.7500
I51300	1-1/4-1-3/8	886.00	6.5000	3.5000	-	.3700	9.0800	6.8100	3.5000
I51305	1-3/8-1-1/2	1294.80	6.2500	3.5000	-	.5000	9.0000	7.1200	3.5000