


Alloy Master Link With Large Sub Link Grade 100 (Peerless)

CATALOG (SKU) NUMBER: PEER-8452

- For construction of double, triple, and quadruple rigging slings.
- For use with grade 80 or 100 chain slings, wire rope, and synthetic assemblies.
- Design factor is 4:1.
- Meet or exceed all requirements of ASME B30.26.
- Proof tested in accordance with ASTM A952.
- Available in Chinese import or U.S.A. domestic upon request.



G-100 Master Link With Sub-Assemblies

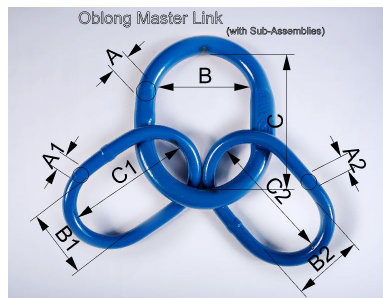

oblong master link w
assembly DIM

Product Specifications

| ALLOY MASTER LINK WITH LARGE SUB ASSEMBLIES (PEERLESS) GRADE 100 | | | | | | | | | | | |
|--|-----------|-----------|---|----------------|-------|--------|--------|-------|--------|--------------|-------------------|
| PART NUMBER | SIZE (IN) | SIZE (MM) | WORKING LOAD LIMIT FOR TRIPLE AND QUAD LEG ASSMBLY @ 60 DEGREES (LBS) | DIMENSION (IN) | | | | | | WEIGHT (LBS) | COUNTRY OF ORIGIN |
| | | | | A | B | C | A1 | B1 | C1 | | |
| PEER-8852100 | 3/4 | 20 | 11,200 | 0.787 | 3.74 | 6.299 | 0.551 | 2.756 | 4.724 | 6.4 | GERMANY |
| PEER-8852200 | 7/8 | 23 | 14,800 | 0.906 | 4.331 | 6.299 | 0.63 | 3.15 | 5.512 | 7.4 | GERMANY |
| PEER-8852300 | 1 | 27 | 22,900 | 1.0633 | 4.331 | 7.480 | 0.787 | 3.74 | 6.299 | 11 | GERMANY |
| PEER-8852400 | 1-1/4 | 33 | 39,000 | 1.299 | 5.118 | 9.055 | 1.0634 | 4.331 | 7.480 | 21 | GERMANY |
| PEER-8852500 | 1-1/2 | 38 | 58,700 | 1.496 | 5.906 | 10.827 | 1.2995 | 5.118 | 9.055 | 25.5 | GERMANY |
| PEER-8852600 | 1-3/4 | 45 | 91,700 | 1.772 | 7.087 | 13.386 | 1.4965 | 5.906 | 10.827 | 61.3 | GERMANY |
| PEER-8852700 | 2 | 50 | 110,900 | 1.969 | 7.480 | 13.780 | 1.7727 | 7.087 | 13.386 | 93.0 | GERMANY |