


Stainless Steel 1-Piece Duplex Swaging Sleeve (Domestic)

CATALOG (SKU) NUMBER: SLEEVE DUPLEX 1PC

- ESCO stainless steel duplex sleeves provide the quickest and simplest way to make strong swaged turnback eyes in wire rope.
- Duplex sleeves permit easy adjustment of eye size.
- Grommets, plain eyes and tight thumbed eyes can be made quickly and precisely every time without splicing or die changes.
- These swage sleeves are cast with the popular ESCO 40SS stainless steel, created specifically for swaging.
- High initial ductility allows ESCO stainless steel to flow evenly around the wire rope during swaging, for total gripping strength and extremely high crack and fracture resistance.
- During swaging, ESCO stainless steel hardens more than any other swaging steel to provide toughness, on-the-job durability and corrosion resistance.



SS Duplex Sleeve

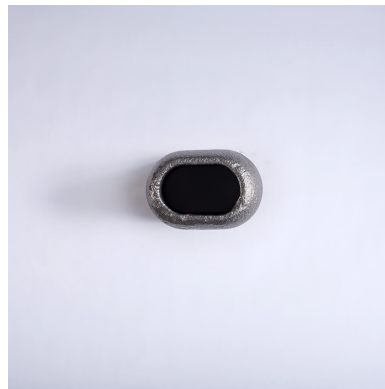

Stainless Steel Duplex Sleeve
A



SS Duplex Sleeve2



Stainless Steel Duplex Sleeve
B (side)

Product Specifications

| STAINLESS STEEL 1-PIECE DUPLEX SWAGE SLEEVE (DOMESTIC) | | | | | | | | | | |
|---|---------------------------------------|-------------------------|-------------------|------------|-------------|----------------|----------|---------------------------|----------------------------------|--|
| | | | DIMENSION (IN) | | | | | | | |
| PART NUMBER | WIRE ROPE DIAMETER SIZE (IN) | WEIGHT EACH (LBS) | BEFORE SWAGE | | | AFTER SWAGE | | BOX QUANTITY (EACH) | USE ESCO SWAGE DIE SIZE | |
| | | | A (LENGTH) | B WIDTH | C HEIGHT | A LENGTH | DIAMETER | | | |
| 4005970 | 1/8 | 0.03 | .4375 | .2500 | .3750 | .5000 | 0.2600 | 100 | 1/8IN OPEN CHANNEL | |
| 4005961 | 3/16 | 0.03 | .5000 | .3750 | .5625 | .5625 | 0.3800 | 100 | 3/16IN OPEN CHANNEL | |
| 5128245 | 1/4 | 0.04 | 1.0000 | .5000 | .7500 | 1.1250 | 0.5300 | 100 | 1/4IN OPEN CHANNEL | |
| 5103273 | 5/16 | 0.18 | 1.5938 | .7813 | 1.1250 | 1.5625 | 0.7600 | 100 | 3/8IN OPEN CHANNEL | |
| 5103270 | 3/8 | 0.14 | 1.7188 | .8125 | 1.1250 | 1.8750 | 0.7600 | 100 | 3/8IN OPEN CHANNEL | |

| STAINLESS STEEL 1-PIECE DUPLEX SWAGE SLEEVE (DOMESTIC) | | | | | | | | | |
|---|------|------|--------|--------|--------|--------|--------|-----|--------------------------|
| 5103262 | 7/16 | 0.35 | 2.0313 | 1.0313 | 1.4375 | 1.9375 | 1.0100 | 100 | 1/2IN OPEN CHANNEL |
| 5103261 | 1/2 | 0.31 | 2.0000 | 1.0000 | 1.4375 | 2.2500 | 1.0100 | 100 | 1/2IN OPEN CHANNEL |
| 5103272 | 9/16 | 0.60 | 2.2500 | 1.2500 | 1.7500 | 2.5000 | 1.2700 | 50 | 5/8IN OPEN CHANNEL |
| 5103269 | 5/8 | 0.60 | 2.7188 | 1.2500 | 1.8125 | 2.6250 | 1.2700 | 50 | 5/8IN OPEN CHANNEL |
| 5103271 | 3/4 | 1.00 | 3.0000 | 1.4375 | 2.1250 | 3.3750 | 1.5300 | 25 | 3/4IN OPEN CHANNEL |
| 5103263 | 7/8 | 1.50 | 3.7500 | 1.7200 | 2.4063 | 4.2031 | 1.7600 | 25 | 7/8IN OPEN CHANNEL |
| 5103268 | 1 | 2.00 | 3.7500 | 2.0000 | 2.8125 | 4.2500 | 2.1300 | 25 | 1IN OPEN CHANNEL |